


DERAY[®]-PressMelt

Longitudinal water sealing system

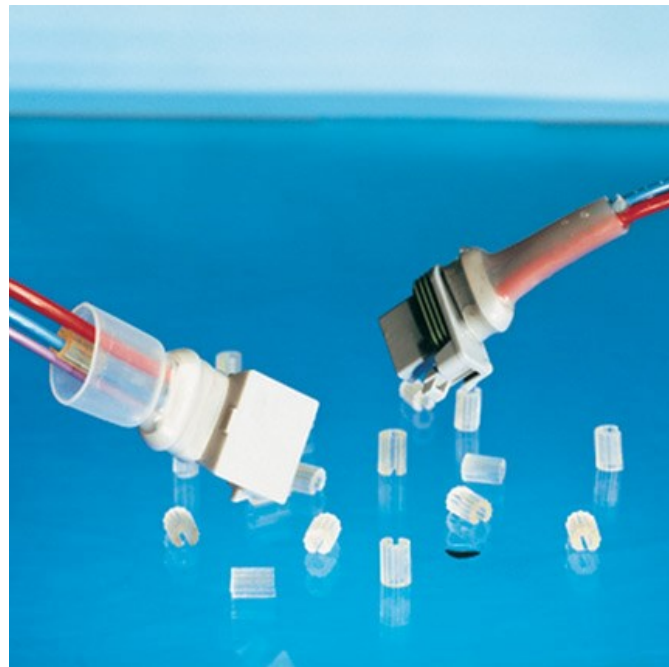

PROPERTY	TEST METHOD	TYPICAL PERFORMANCE 85°C / 105°C
Physical		
Material	n/a	Modified polyamide free of lead and cadmium
Specific Gravity	ASTM D792, A-1	0.97/0.98 g/cm ³ (max.)
Colour	n/a	Amber/Red
Viscosity	ASTM D3236	35,000 MPa at 160°C; 15,000 MPa at 160°C
Low Temperature Flexibility	ASTM D2671 Meth C	Does not break at -40°C
Storage Temperature	n/a	30°C
Softening Temperature	n/a	90°C/130°C
Chemical		
Water Absorption	DIN 53495	0.5%

Version: 01 2018/JAN/02